

Large Decal Installation (Dry Method)

Caution: The adhesive used on these decals is very strong and meant for permanent installation. Once the decal has been applied, it cannot be removed without destroying the decal.

Minimum Application Temperature: 46 Degrees F

Please follow the installation instructions carefully.

Tools/Supplies needed:

1. Masking tape
2. A stiff squeegee or straightedge (Included).
3. Scissors
4. Tape Measure

Preparation:


1. Clean the surface thoroughly using alcohol or Glass Cleaner to remove all traces of wax, grease, or dirt.

Installation


1. Place the decal in the desired position and hold it in place using masking tape, as shown (Figure A).
Note: Do not remove the backing paper or transfer paper at this point.
2. Carefully peel the transfer paper half way back from the backing paper (Figure B), taking care not to let the decal fold over on itself, or touch any surfaces (a couple of fingerprints will not hurt the adhesion).
3. Use the scissors to carefully cut and remove the exposed backing paper as shown in (Figure C)
4. Begin laying the decal back down (Figure D). Using the squeegee, press the decal into place, working from the center outward.
Note: Work slowly, being careful to avoid any wrinkles in the decal.
5. Carefully peel the other half of the transfer paper back (Figure E). Refer to Paragraph 2 for details.
6. Remove the remaining backing paper. Begin laying the transfer paper back down onto the surface following the procedures described in Paragraph 4.




(A)

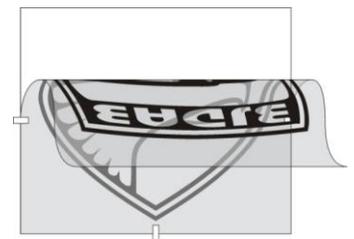


(B)

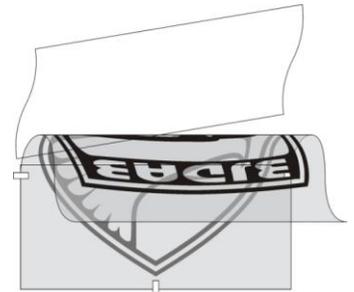

(C)

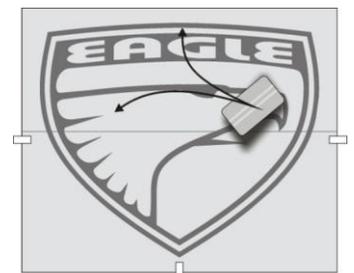

(D)

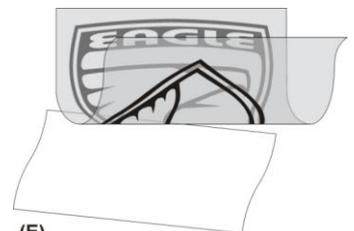

(E)

7. Once the decal has been applied, go over it several times with the squeegee to ensure it is completely pressed into place (Figure F).
Note: Pull the squeegee across the surface. Pushing the squeegee could tear the paper and the vinyl.
8. Begin pulling the transfer paper off (Figure G), starting at one corner and working across to the opposite corner.
9. Work slowly during this process, small letters and details may lift up with the transfer paper. If this happens, simply lay the paper back into place, press it back down with the squeegee.
10. Once the transfer paper has been removed, the decal and surrounding area should be gently cleaned using a soft cloth and glass cleaner (Do not scrub the decal).



(F)

Note: Small bubbles can be removed by sticking the bubble with a needle, and gently pressing the bubble down.

Care and Maintenance:

1. Although the decal is now permanent, it requires several days to completely set up. Avoid scrubbing the area around the decal for at least 5 days. **Do Not** use a pressure washer, automatic car wash, or wax during this time. (After the decal has set up, it is safe to use automatic car washes, and wax).
2. When washing the decal, Do Not use scrapers or scrubbing pads on the vinyl.
3. Regular auto washing detergents should not harm the vinyl. Do not use petroleum-based cleaners, such as kerosene, gasoline, or “Bug and Tar” removers.